



# Fun with Fusion Radio

With an introduction to Yaesu Fusion Radio

Presented by Bill Buckwalter WØSUN

# Fusion Confusion!

WiRES-X

C4FM

YSF

FCS

HotSpot Jumbospot  
openSPOT Pi-star

Reflector

Brandmeister





Yaesu Digital World ←Part 1 →

WiRES-X Node

← Part 2 →

Hotspots

YSF Reflectors

FCS Reflectors

PI-Star

openSP0T Cross Mode

DMR Brandmeister

# Yaesu Digital World



# Fusion Repeaters and Nodes Denver and Surrounding Areas

- ▶ **Links: Yaesu WiRES-X Active Nodes**  
[http://www.yaesu.com/jp/en/wires-x/id/active\\_node.php](http://www.yaesu.com/jp/en/wires-x/id/active_node.php)  
<https://www.hamoperator.com/rw/>  
[https://www.repeaterbook.com/repeaters/index.php?state\\_id=none](https://www.repeaterbook.com/repeaters/index.php?state_id=none)
- ▶ **SKYHUBLINK REPEATERS** - <https://skyhublink.com/repeaters/>  
**448.35** – Hub. Permanently linked to **DENVERSKYHUBLINK 46361**  
**449.625** Denver to Loveland  
**449.600** Littleton above Lockheed Martin
- ▶ **Parker Radio Association** <https://www.parkerradio.org/on-the-air/>  
**447.225** Linked to **COLORADO-MEGA 40895**
- ▶ **Denver Radio Club**  
**449.775** – No WiRES-X. Just Fusion
- ▶ **Simplex WiRES-X Nodes** – Experimental  
**146.535** - KCØJIM-HRO Ham Radio Outlet Denver  
**145.560** - WØSUN-GW Centennial, Lone Tree  
**145.5625** – National Yaesu Fusion Simplex Frequency

# KØPRA Fusion Repeater – 447.225

KOPRA-RPT - Node 30895 : Colorado Mega : WiRES-X 40895

YSF US ColoradoMega 23160 : DMR BM TG310759 : D-STAR XRF223-B

Yeasu DR-2X Repeater



➔ Duplexer and HRI-200





# Yaesu Terminology

- ▶ **WiRES-X:** This is one of Yaesu's current methods of Internet linking. It is used primarily for linking Yaesu amateur digital radios.
- ▶ **IMRS:** Internet-Linked Multi-Site Repeater System. This system also uses the Internet but primarily links Yaesu amateur digital repeaters. Either IMRS OR WiRES-X can link repeaters, but not both at the same time.
- ▶ **System Fusion:** Basically this refers to the ability of Yaesu's amateur digital radios to automatically switch between analog FM and digital FM use. You may select either, or automatic switching.
- ▶ **System Fusion vs. System Fusion II:** System Fusion II simply refers to upgraded capabilities that came with software and firmware updates. All System Fusion radios with the latest firmware are System Fusion II compatible.
- ▶ **C4FM:** C4FM refers to a type of modulation that is used by Yaesu in their amateur digital radios as well as by others. Yaesu has made their radios incompatible with other existing commercial digital platforms.

# Tech Spec Comparison

	D-STAR	DMR	Fusion
Vocoder (see note)	AMBE+	AMBE+2	AMBE+2
Forward Error Corr.	Voice Only	Voice Only	Voice Only
Modulation	GMSK	4FSK	C4FM
Multiplex Method	FDMA	TDMA	FDMA
Transmission Rate	4.8 kbps	4.8 kbps x 2	9.6 kbps
Bandwidth	6.25 kHz	12.5 kHz	12.5 kHz
Channels supported	1	2	1
Standard Developer	JARL	ETSI	Yaesu

GMSK = Gaussian Minimum Shift Keying

4FSK = 4-level Frequency Shift Keying

C4FM = Continuous 4-level Frequency Modulation

FDMA = Frequency Division Multiple Access

TDMA = Time Division Multiple Access

5YZD

Note: Newer radios implement the vocoder in the DSP chip




# Digital Wide and Digital Narrow (DN)




## Analog Modulation


SSB

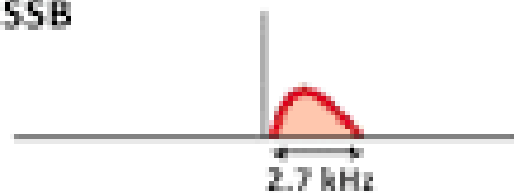

AM

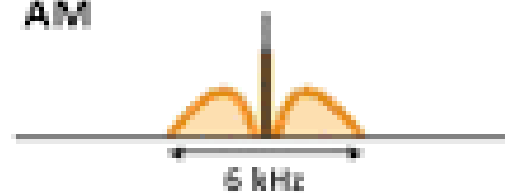


FM

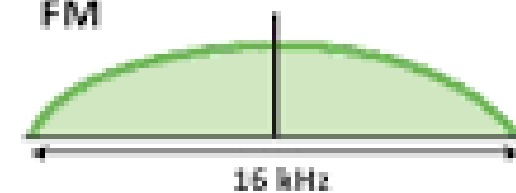


## Digital Modulation

FDMA

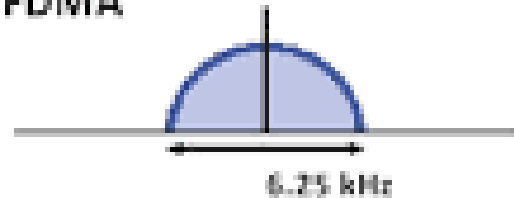

FDMA/TDMA

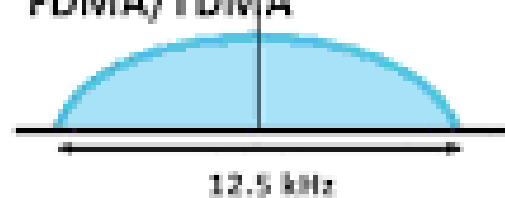

Bandwidth Comparison



# WHAT MAKES IT FUSION

- System Fusion is different from D-star, DMR
- It's automatically backwards compatibility with analog FM
- AMS or Automatic Mode Select
- If a QSO input starts as FM, the repeater “repeats” FM
- If the QSO input starts as C4FM, it “repeats” C4FM
- Each endpoint (HT, mobile, etc.) auto-switches

## \*\* FTM-400XDR TIP

- WIRES-X digital C4FM only works on Band “A”.      TOP
- APRS only works on band “B”.                      BOTTOM



# WHAT IS C4FM AND FUSION?

- Easy to setup. Simply enter your call sign. No need to register with worldwide database.
- Excellent digital audio quality
- Send pictures over-the-air
- See the callsign, distance, and direction of received users
- All Fusion radios can perform both analog and digital communication
- Most Fusion radios (except the FT-991) have APRS with GPS built-in
- Via WiRES-X, Fusion radios can communicate world-wide, share photos & texts, leave voice messages, etc.




**WIRES-X**

*Wide-Coverage Internet Repeater Enhancement System*

- **C4FM** is the Modulation Method used by Yeasu
- **FUSION** uses AMS to bring FM and C4FM together from NODE to NODE.
- **WIRES-X** is used by nodes to manipulate DATA and change rooms.

# DG-ID → Similar to PL Tones in Analog

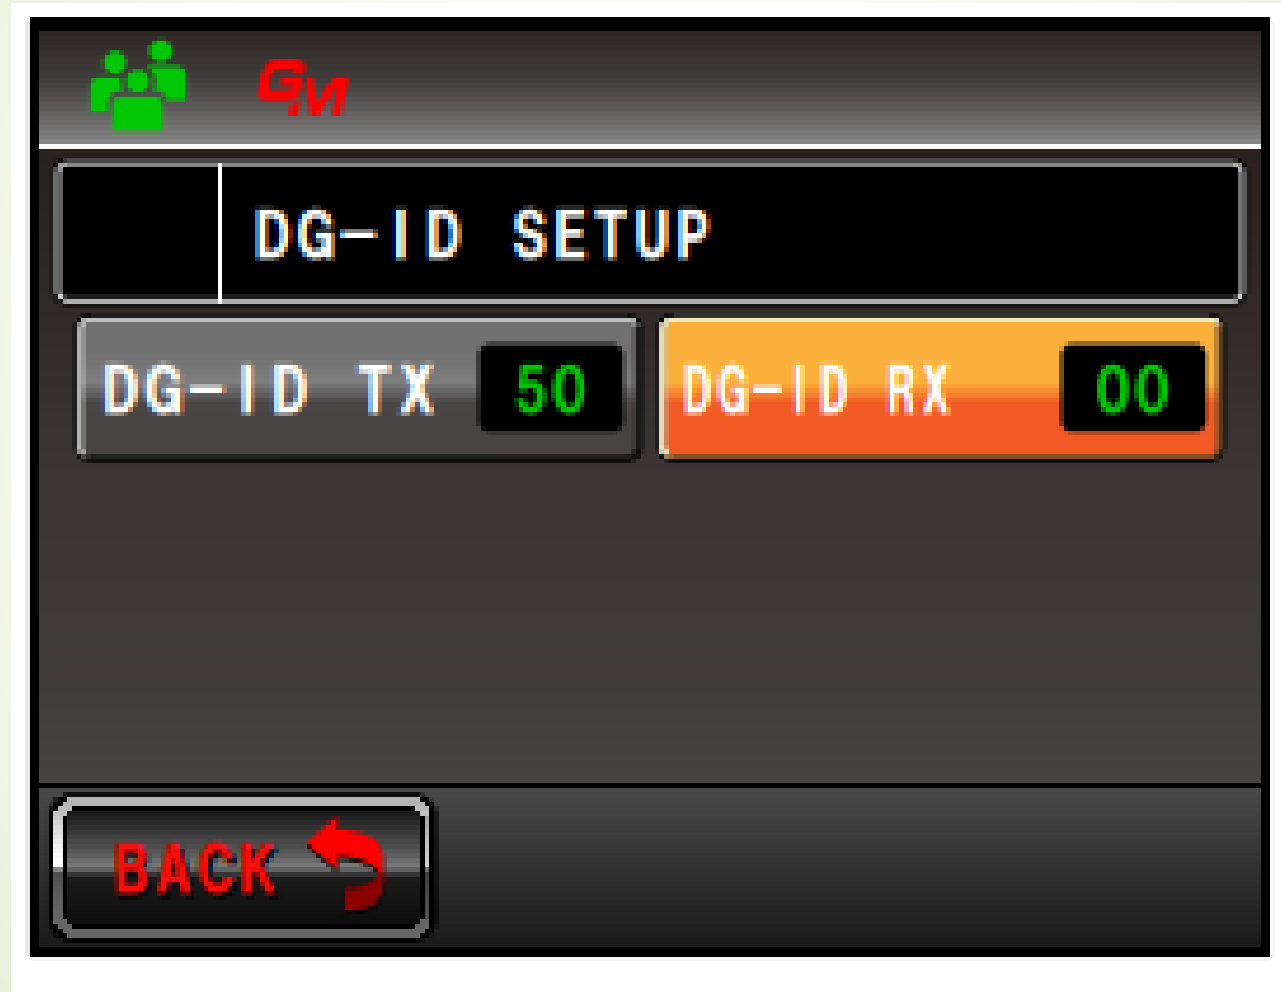

# GM – Group Monitoring



# **WIRES-X**

*Wide-Coverage Internet Repeater Enhancement System*



WIREX-X

File(F) View(V) Connect(C) Tool(T) Help(H)

G.User ID	DTM...	-Act	Call/RmName	City	State	Cou...	Freq(MHz)	SQL	Lat	Lon	Cc
MNWIS-FUSION	21493	020	MNWis Fusion Group	Lino Lakes	Minnesota	USA					Mi
MVARC-IDAHO	43210	018	MVARC BY KB7SQS	Twin Falls	Idaho	USA					
QSO-AMERICA	43815	009		Harvey	Illinois	USA					
CAROL-LINK	43008	009	Carolina Link	Charlotte	North Car...	USA					
DENVERSKYHUBLINK	46361	004	DENVERSKYHUBLINK	Wheat Ridge	Colorado	USA					
COLORADO-MEGA	40895	004	Colorado MEGA XC...	Castle Rock	Colorado	USA					
QUADNET-ARRAY	45058	002	Quadnet Array	Abilene	Texas	USA					
COLORADO-LNK	40052	002	COLORADO LINK	Denver	Colorado	USA					
SE-KANSAS	46341	001	SE-KANSAS	Pittsburg	Kansas	USA					
DWARC	46694										
N2EUS-ROOM	40963	000	Southern Tier Backup	Elmira	New York	USA					
COLORADO-MEGA	40895										
KCOJIM-HRO-DNVR	40866	000	HRO Denver	Denver	Colorado	USA					
CQ-CANADA-VE1AO	40678										
OHIO-LNK	40557										
KANSAS-CITY	28952										

+ A. User ID DTM... CallSign City State Country Freq(MHz) SQL

Room COLORADO-MEGA (40895) member 4 nodes

KCORF KOPRA-RPT MEGALINK WOSUN-GW

Room ID	DTM...	-Act	Room name	City	State
----AMERICA-LINK	21080	154	America Link Network	Beaumont	Texas
ALLJA-CQ-ROOM	20510	134	ALL JA CQ ROOM A	Komoro-city	Nagano
ALLJA-CQ-ROOM-D	20610	079	ALL JA CQ ROOM D	Komoro-city	Nagano
TEXAS-NEXUS	21636	055	TEXAS-NEXUS	Austin	Texas
ITALY	27003	042	WIREX-ITALIA	Cassolnovo	Lombardy
CQ-CANADA-VE1AO	40678	036	CQ-CANADA-VE1AO	Truro	Nova Scotia
-----CQ-UK	27793	033	CQ-UK	Pudsey	West Yorkshire
---FUKUOKA-LINK-	20587	030	FUKUOKA-LINK	Fukutsu-city	Fukuoka
PHILIPPINE-LINK	43534	027	PHILIPPINE-LINK	Rancho Palos V...	California
OHIO-LNK	40557	027	Ohio Link	Columbus	Ohio
ARGENTINA-LINK	40831	025	ARGENTINA LINK	Caba	Buenos Aires
TSQLO945-ROOM	20945	025	fg[f'fX/Pf:f''nD%o	Koriyama-city	Fukushima
THE-DARC-ROOM	28439	022	The DARC Room	Little Falls	Minnesota
KANSAS-CITY	28952	020	Kansas Ciy Metro		Kansas
MNWIS-FUSION	21493	020	MNWis Fusion Gr		Minnesota

Ready

Ver-1.530 ONLINE

View QSL de WOSUN (ID:WOSUN-GW)

DTMF ID: 40895 2020/04/16 16:57:26

Colorado MEGA XCoder

< COLORADO-MEGA #40895 >

HardCopy Save Close

NET DIGITAL ON-AIR LOCAL

COLORADO-MEGA

User = KOPRA > \*\*\*\*\* (DN:FT2D)  
 Uplink = AE2L (35755)  
 Downlink = WOSUNPOT2 (50410)  
 Room = (40895)

2020/04/16 16:57:22 Error: Socket  
 Communication Timeout.  
 2020/04/16 16:57:25 \*-\*-\* Call Start No.40895  
 \*-\*-\*  
 2020/04/16 16:57:26 Room Member 3 Nodes.  
 2020/04/16 16:57:26 Connected to COLORADO-  
 MEGA (40895) .

Close

SEND CLR

News GM



# WiRES-X Node with Room Requires HRI-200




HRO Denver WiRES-X Node  
with HRI-200  
KC0JIM-HRO 2 M 146.535 mhz  
Room Colorado-Link 40052

Hotspot FCS002 -07

# Wires-X Nodes and Rooms



ie. COLORADO-MEGA 40895

- Yaesu Node ID Registration - <https://www.yaesu.com/jp/en/wires-x/index.php>
- **NODE NUMBERS/ROOM NUMBERS/DTMF ID's:** To operate a node, you must first have registered with Yaesu. They will send you both a node number AND room number for every registration. It is only necessary to have one registration for every radio that will be operating in the Wires-X system AT ONE TIME. That is, even if you have 50 digital radios, if you will never use more than one at a time, you will only need one registration. However, most stations get two or three. You may wish to have a fixed node at home and a mobile node that could be transmitting at the same time.
- These numbers are then used by your radio to establish contact with nodes or rooms. They can be input manually or saved into memory, or even searched.
- In order to operate or establish a room you **MUST** have an HRI-200.
- With the new Firmware you can operate a node without a room.




# Operating a WiRES-X Node without HRI-200 = PDN but No Room

- ▶ The following radios can run in PDN mode without an HRI-200:
  - FT3D; FT2D MAIN FW V3.10 - FT2D DSP FW V4.31  
SCU-39 Cable Kit
  - FTM-400XD MAIN Ver 4.40/ DSP Ver 4.31
  - FTM-400D MAIN Ver 3.40/ DSP Ver 4.31
  - FTM-100D MAIN Ver 2.40/ DSP Ver 4.31/ PANEL Ver 2.10  
SCU-40 Cable Kit
  - WiRES-X PC Software V1.50

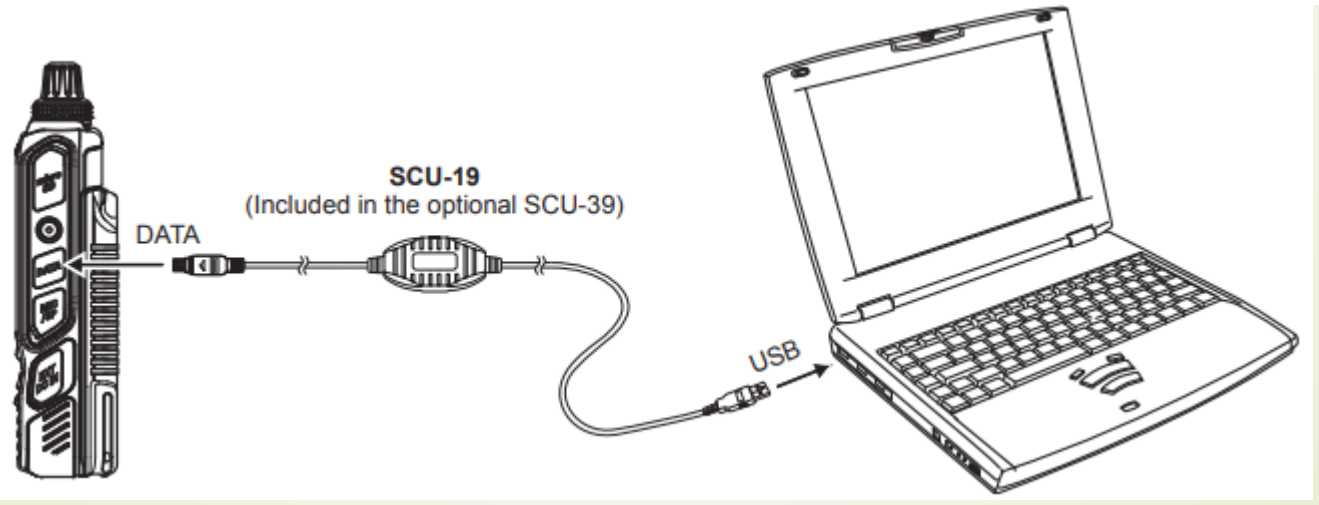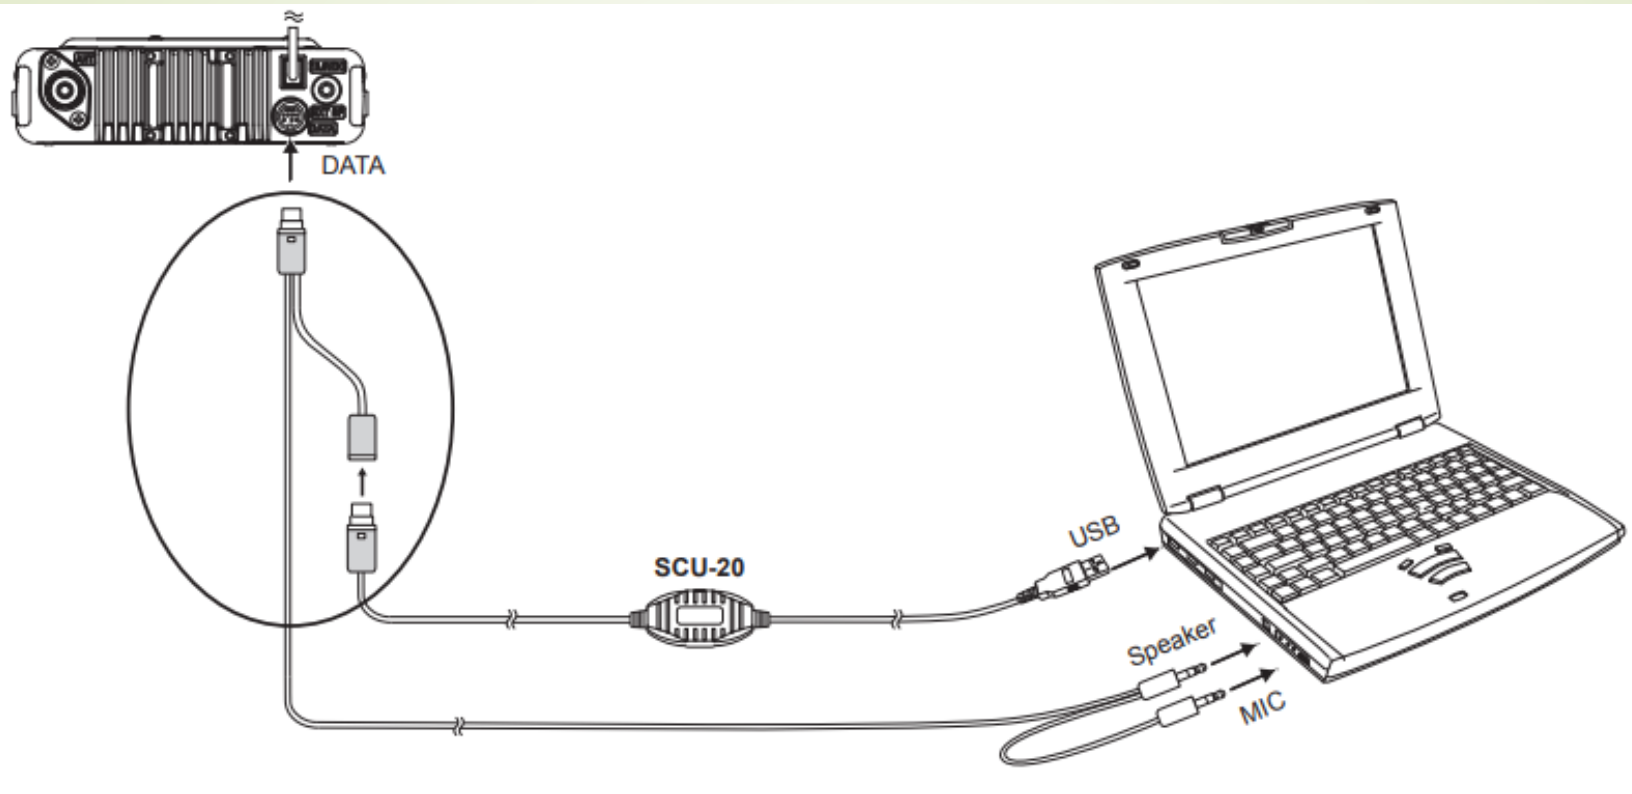


# PDN Mode Direct Connect, No RF, 1 Radio

## Direct Operation (Portable Digital Node Mode) Illustration

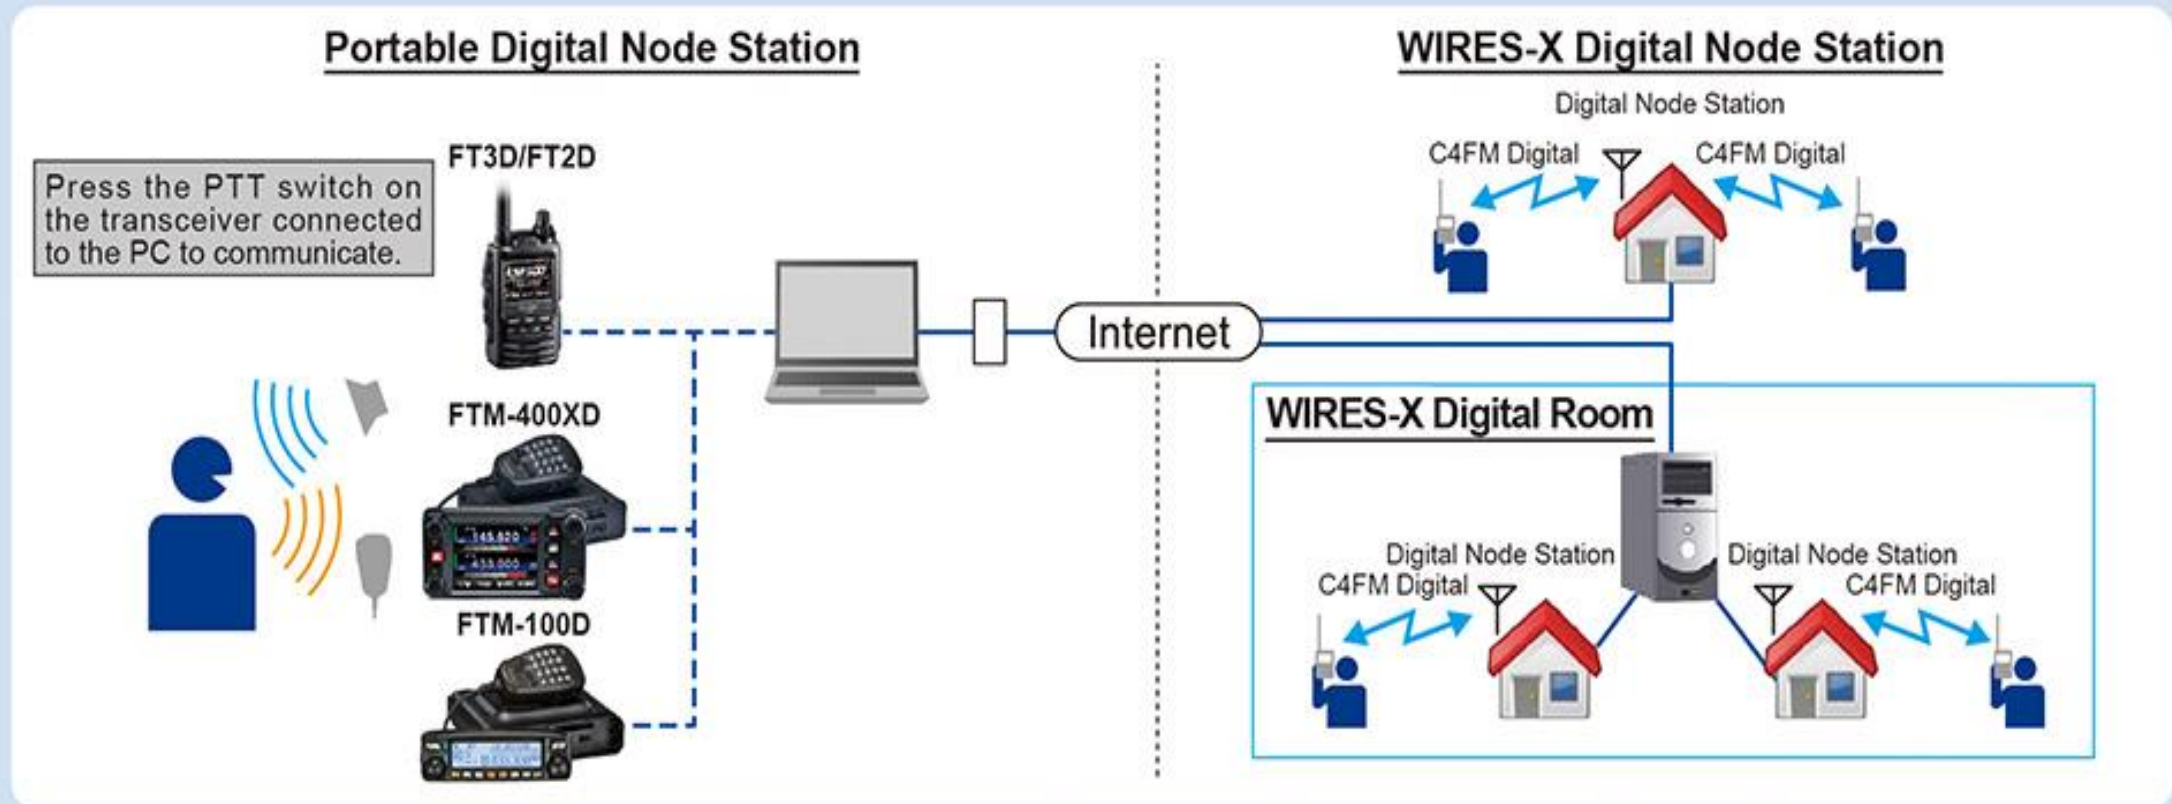

# Access Point PDN Mode, Requires 2 Fusion Radios


## Access Point (Portable Digital Node Mode) Illustration

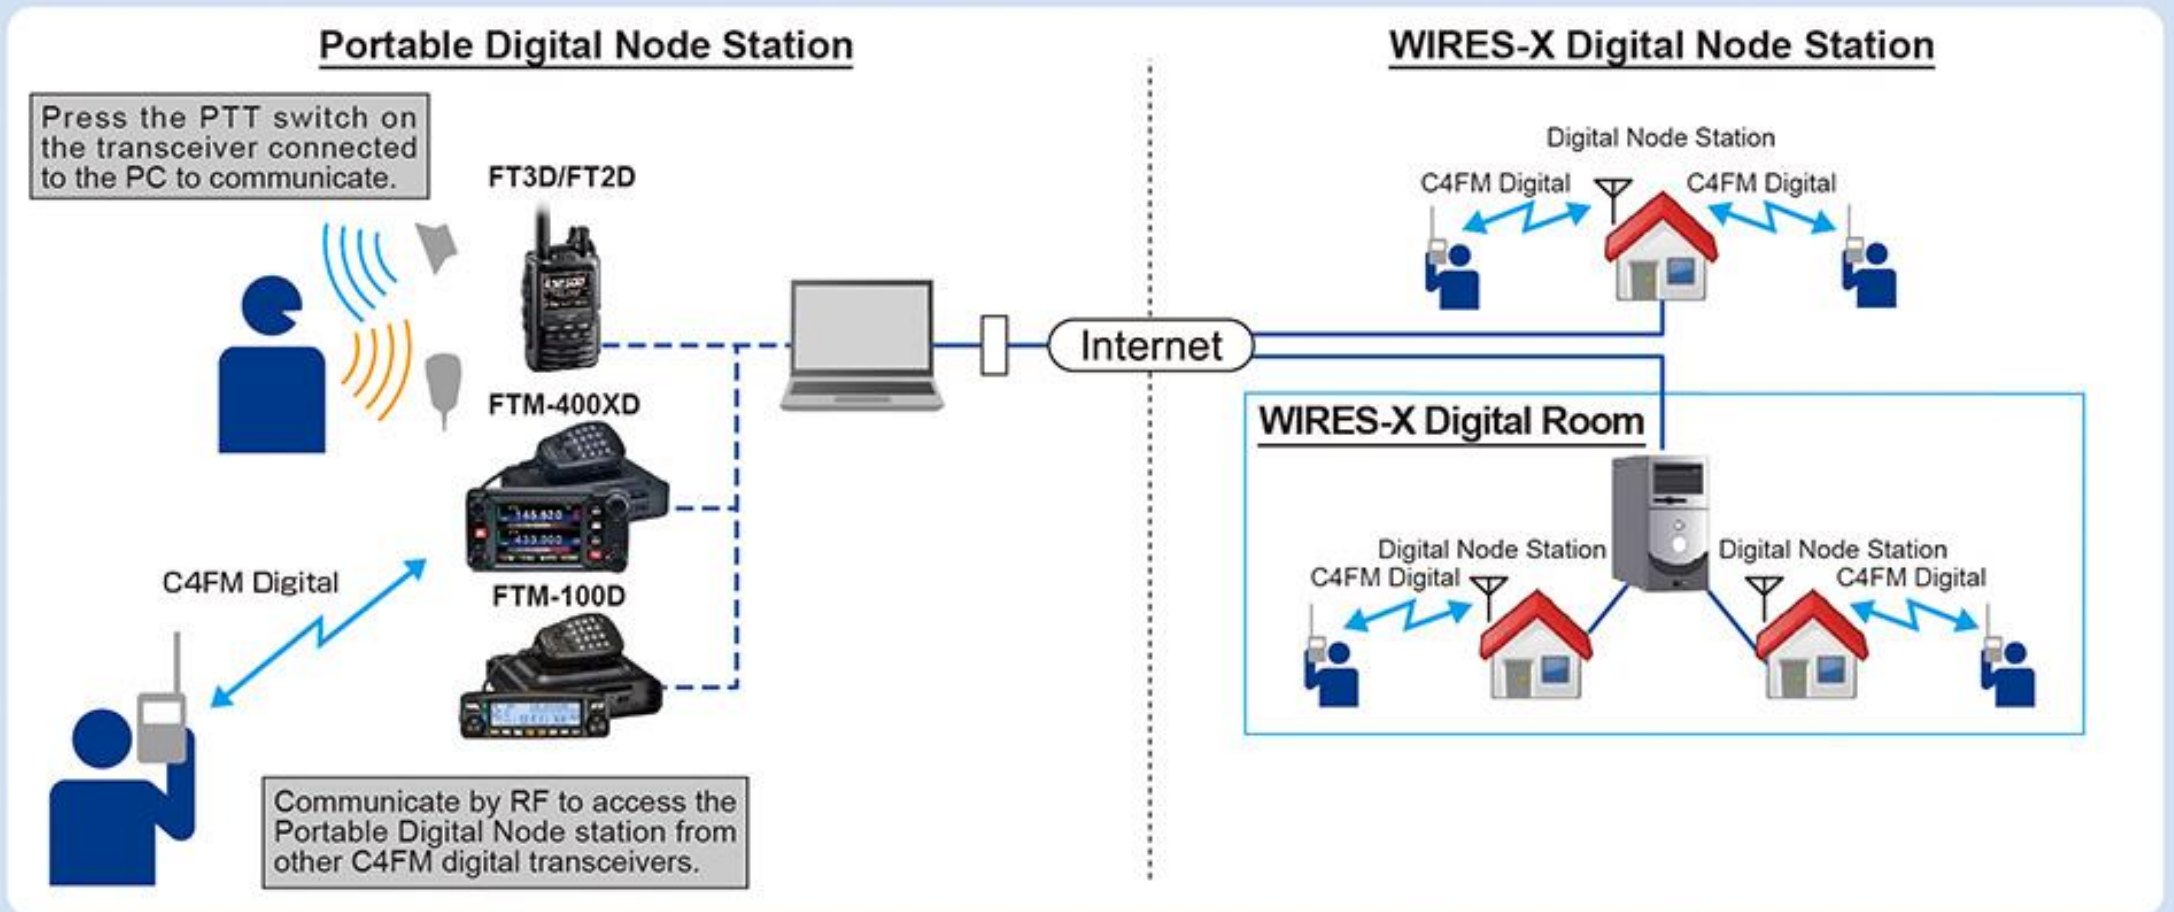


# WIRES-X

Wide-Coverage Internet Repeater Enhancement System

PDN Mode Direct

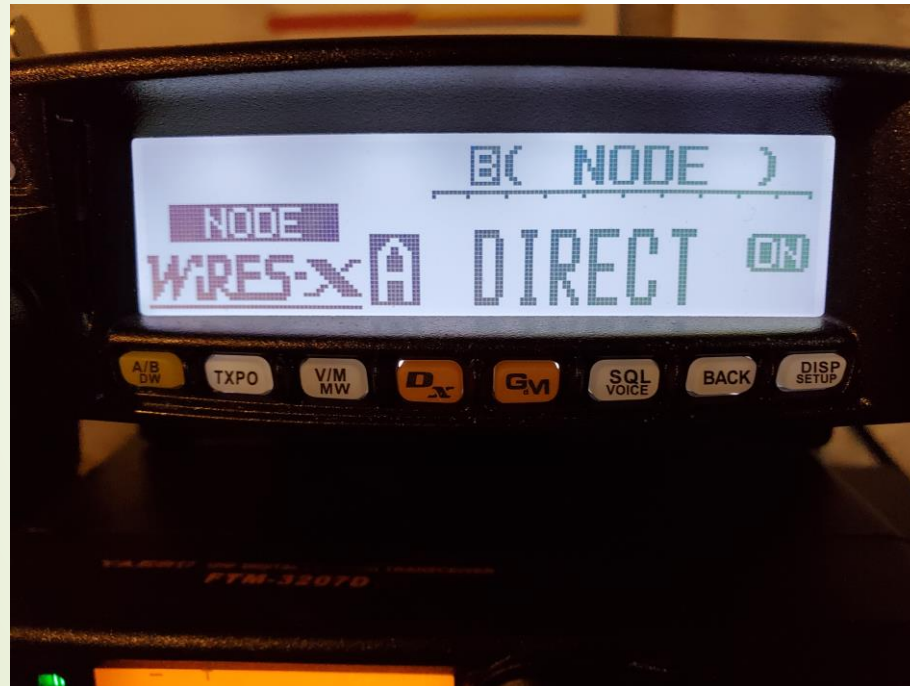

PDN HRI Mode – Access Point

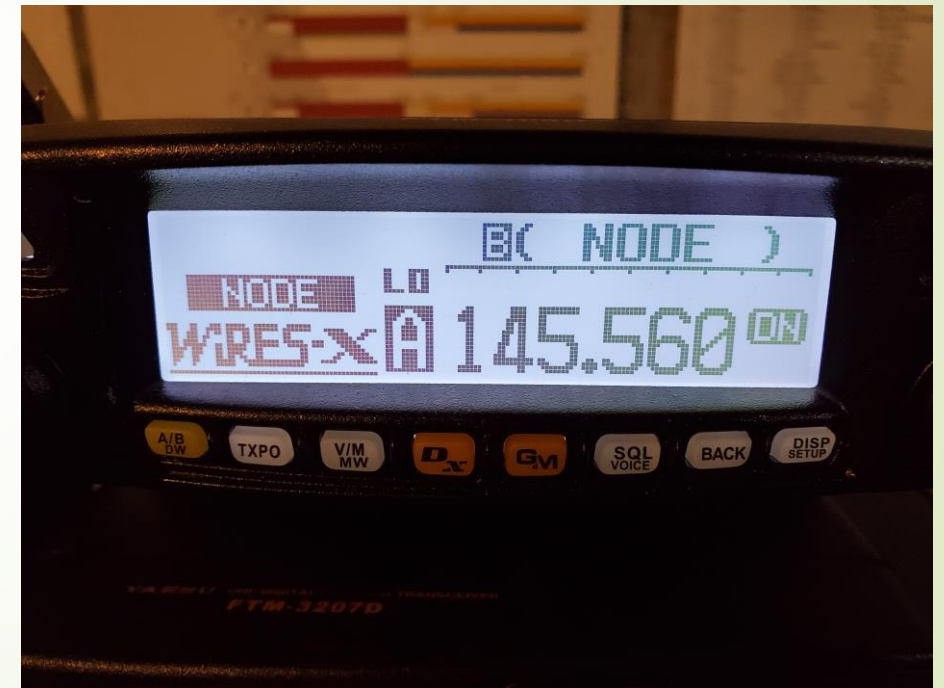




## The Good, and Not So Good

- **Yaesu Digital Method Works Well!**
- **AMS!**
- **Audio Is Superb.**
- **Simple Digital Radio.**
- **Designed for Ham Radio**
  
- **Closed System.**
- **WiRES-X Requires PC Running MS Windows**
- **Expensive!**



# Quickest Way to Digital Radio using a Yaesu FT-70D

To Access WiRES-X → [F] + [AMS] (WiRES-X Two Step) (HRO Denver 146.535)  
then Twist Left Twice. (To Exit WiRES-X → Press and hold the [Mode] button)

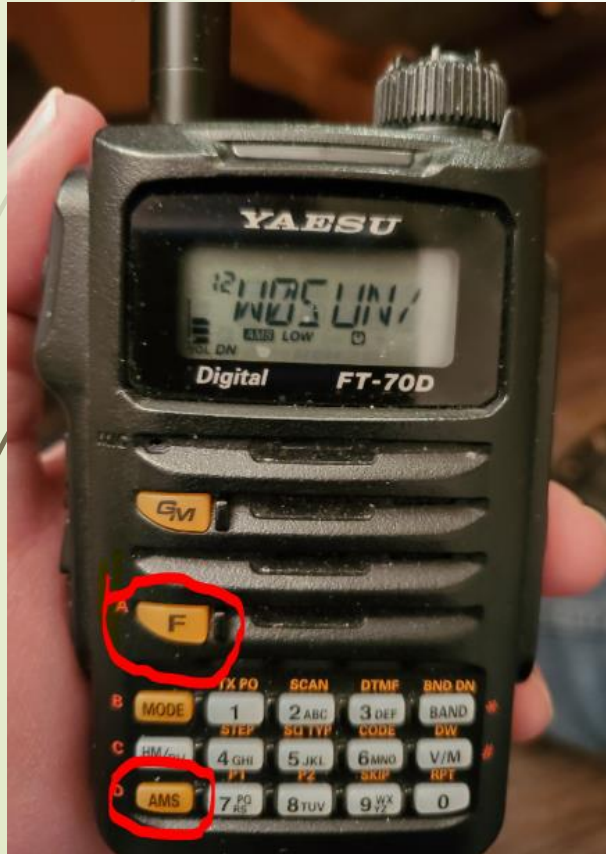

For a Wires-X Node  
#40895 Press [AMS]



For a C4FM Hotspot  
#23160 (YSF Server)



# HOTSPOTS and Digital Radio Here's Where The Fun Begins!





Get A DMR ID

<https://www.radioid.net/register>



# openSPOT•3


by SharkRF

The whole world in your pocket.



# Digital World on a Budget

FUSION Yaesu FT-70D \$150

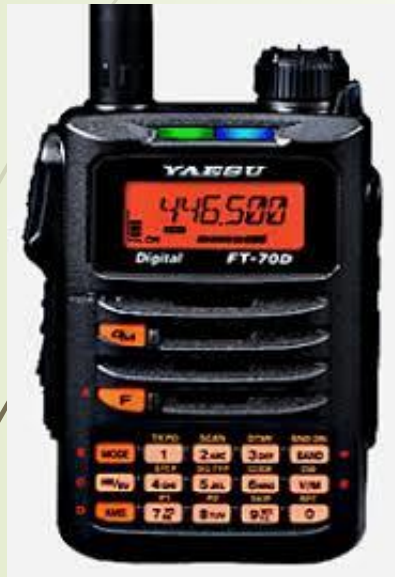

DMR TYT MD-380 \$80-\$100



Jumbospot \$70-\$100



Build Your Own Hotspot - \$40  
<https://www.dmr-utah.net/hotspot>



# Digital Deluxe

FUSION FT-3D



DMR Anytone 878



**openSPOT-3**  
by SharkRF

**THE BEST**  
Digital Modem Hotspot

A white, handheld digital modem hotspot device with two green LEDs and the 'openSPOT-3' logo on the back.

## Status

Limit call log lines  Autoscroll

To: **310844**  
From: **WOSUN William D** (3135334, United States)  
Group DMR voice call from modem  
End: 14:35:21

To: **ALL**  
From: **WOSUN-BILL** (Radio ID: H5N7N)  
Group C4FM voice call from modem  
Sent as DMR group call dst 3149 src 3135334  
End: 14:35:21 (00:05.9s BO.3% -49dBm)  
(DN mode 2)

Clear call log

Export call log

Status:

● connected

Background conn. status:

DAPNET |  APRS

Active config profile:

4 (C4FMtoDMR)

Advanced mode

QS

Export call log

Background conn. status:

DAPNET |  APRS

Active config profile:

1 (default)

Active connector:

DCS/XLX

Modem mode:

D-STAR

Modem RX/TX frequency, power:

432.400000/432.400000 100%

Server address:

75.145.119.225

Connected to:

DCS376/D

## openSPOT3 info

Battery:

ready

78%

Hardware version:

1.0

Firmware version:

1 (default)


Advanced mode

QS

# Cross Mode – It Doesn't Get Any Better.

Choose Your Radio!

Choose Your Server!

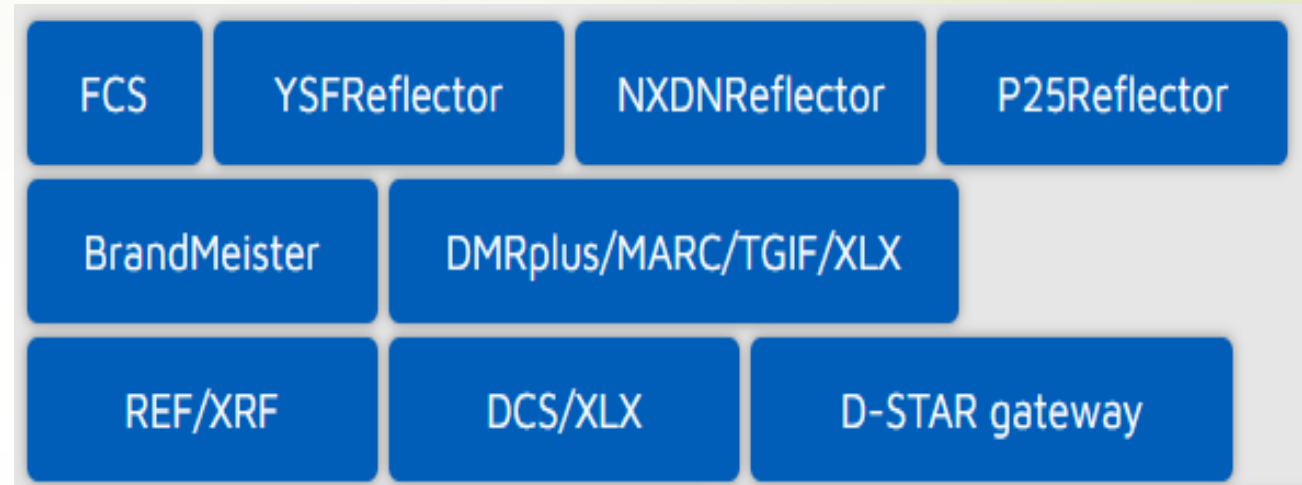



# Pi-Star Digital Voice Dashboard for W0SUN

[Dashboard](#) | [Admin](#) | [Configuration](#)

## Modes Enabled

D-Star	DMR
YSF	P25
	NXDN
DMR XMode	POCSAG

## Network Status

D-Star Net	DMR Net
YSF Net	P25 Net
YSF2DMR	NXDN Net
YSF2NXDN	YSF2P25
DMR2NXDN	DMR2YSF

## Radio Info

Trx	Listening
Tx	434.100000 MHz
Rx	434.100000 MHz
FW	HS_Hat:v1.4.6
TCXO	14.7456 MHz

## DMR Repeater

DMR ID	3135334
DMR CC	1
TS1	disabled
TS2	enabled
TG 310844/No Ref	

## DMR Master

BM United States ..

## YSF Network

Room: US Colorado..

## Gateway Activity

Time (MDT)	Mode	Callsign	Target	Src	Dur(s)	Loss	BER
14:18:43 Apr 20th	DMR Slot 2	W0SUN	TG 310844	RF	0.4	0%	0.2%
13:31:57 Apr 20th	YSF	K0PRA	ALL at XLX720	Net	6.4	0%	0.0%
13:31:30 Apr 20th	YSF	AC0YV	ALL at XLX720	Net	21.6	0%	0.0%
13:25:29 Apr 20th	YSF	W0SUN	ALL at XLX720	Net	3.1	0%	0.0%
11:56:19 Apr 20th	YSF	KF5XK	ALL at XLX720	Net	5.2	0%	0.0%
11:43:43 Apr 20th	YSF	K00J	ALL at XLX720	Net	0.9	0%	0.0%
10:57:46 Apr 20th	YSF	N4S3W	ALL at XLX720	Net	0.2	0%	0.0%
10:57:29 Apr 20th	YSF	W0SUN	ALL	RF	16.4	0%	0.6%
10:47:02 Apr 20th	YSF	W0SUN	ALL	RF	3.0	0%	2.0%
08:55:00 Apr 20th	YSF	W8XAL	ALL at XLX720	Net	0.6	0%	0.0%
06:57:58 Apr 20th	YSF	AA0RX	ALL at XLX720	Net	3.6	0%	0.0%
06:54:31 Apr 20th	YSF	WA0SPM	ALL at XLX720	Net	0.2	0%	0.0%
06:54:30 Apr 20th	YSF	K0FTN	*****EAHNS at K0FTN	Net	0.9	0%	0.0%
05:06:08 Apr 20th	DMR Slot 2	KA5GTM	TG 310844	Net	2.2	0%	0.0%
21:09:05 Apr 19th	YSF	KE0PCI	ALL at XLX720	Net	0.6	0%	0.0%
21:00:40 Apr 19th	YSF	AE0IN	*****EA9jI at AE0IN	Net	0.3	0%	0.0%
19:12:09 Apr 19th	DMR Slot 2	KB4SMK	TG 310844	Net	5.9	0%	0.0%
16:54:00 Apr 19th	YSF	AF90	ALL at XLX720	Net	10.0	0%	0.0%
16:04:45 Apr 19th	YSF	KE0WHY	ALL at XLX720	Net	0.8	0%	0.0%
15:24:12 Apr 19th	YSF	3164008	ALL at XLX720	Net	1.6	0%	0.0%

## Local RF Activity

Time (MDT)	Mode	Callsign	Target	Src	Dur(s)	BER	RSSI
14:18:43 Apr 20th	DMR Slot 2	W0SUN	TG 310844	RF	0.4	0.2%	S9+44dB
10:57:29 Apr 20th	YSF	W0SUN	ALL	RF	16.4	0.6%	S9+39dB
10:47:02 Apr 20th	YSF	W0SUN	ALL	RF	3.0	2.0%	S9+41dB

# Where To Begin?

**PI-STAR**

BrandMeister Tools

DMR+ Tools

D-Star Tools

YSF/FCS Tools

P25 Tools

NXDN Tools

➔ <https://www.pistar.uk/>

# FCS Reflectors

- An FCS reflector is a large server that can host up to 100 “Modules”. In this case each module is like a Room or a channel. There can be 100 independent groups that are only separated by their module or channel number. The modules are identified by a number, such as “FCS003-23”.
- There are only 8 FCS reflectors in the world. They are FCS001: Europe, FCS002: Florida, FCS003: Canada, FCS004: Spain
- FCS005: Experimental Semi-Production
- FCS222, FCS224, FCS232: New Experimental

# FCS Reflectors

## Production

- ▶ **FCS001** - <http://fcs001.xreflector.net/>
- ▶ **FCS002** - <http://fcs002.xreflector.net/>
  - ▶ **FCS00207, FCS002-07 Colorado** → **WiRES-X 40052**
  - ▶ **FCS00290, FCS002-90 AmericaLink** → **WiRES-X 21080**
- ▶ **FCS003** - <http://www.laboenligne.ca/fcs003/>
  - ▶ **FCS00390, FCS003-90 AmericaLink** → **WiRES-X 21080**
- ▶ **FCS004** - <http://fcs004.xreflector.net/>
- ▶ **FCS005** - <http://fcs005.xreflector.net/>

## Experimental

- ▶ **FCS222**
- ▶ **FCS224**
- ▶ **FCS232**

# YSF

- YSF reflectors can only host one Room or Reflector per instance. Unlike FCS, it is easy for an individual or a club to set up their own YSF Reflector. YSF Reflectors are identified by their name or their number. YSF Reflectors use a master List Server: [ysfreflector.de](http://ysfreflector.de).
- To Register a YSF Reflector - <https://register.ysfreflector.de/>
- YSF Reflector List - [https://www.pistar.uk/ysf\\_reflectors.php](https://www.pistar.uk/ysf_reflectors.php)
- 23160 US ColoradoMega → XLX376 → **WiRES-X 40895**
- 89804 AmericaLink → **WiRES-X 21080**
- ColoradoMega YSF Reflector Dashboard - <http://ysf.parkerradio.org/>

# DMR Radio - Brandmeister

- **What Is The Brandmeister Network?**
- **The Brandmeister Network was born from several worldwide hams and software engineers who joined together to create a digital repeater network consisting of master servers and peer repeaters all over the world.**
- **The network has over 4100 repeaters and more than 13,000 hotspots across the globe and it's growing every day!**
- **The Brandmeister Network allows for DMR repeaters to connect worldwide via the internet and link systems together by utilizing organized Talkgroups.**
- **The Colorado Mega Reflector is accessed through Brandmeister Talkgroup 310759.**
- **Parker Radio Association DMR Repeater use TS1 310759 and TS2 310844**
- **Hotspots typically don't care about Time Slots,**

# DMR Radio – Brandmeister

## Master Servers – 3101, 3102, 3103

- TG 9 Local or Reflector
- **TG 91 World-wide**
- TG 92 Europe
- **TG 93 North America**
- TG 95 Australia, NZ
- TG 235 United Kingdom
- TG 272 Ireland
- TG 302 Canada
- TG 404 India
- **TG 505 Australia**
- TG 515 Philippines
- TG 530 New Zealand
- TG 655 South Africa
- TG 913 English
- TG 923 European English
- TG 969 DMR-Caribbean
- TG 973 SOTA

- **TG 3100 USA – Nationwide (Bridge)**
- **TG 3108 - Colorado**
  - TG 31080 Colorado Chat
  - TG 31081 Park County Colorado
  - TG 31082 Colorado-Link
  - TG 31083 CO Severe WX
  - TG 31084 NOCO Mountain FR
  - TG 31085 SkiCountryARC
  - TG 31088 Colorado HD
- **TG 310759 Colorado Mega**
- **TG 310844 PRA**
  - TG 310804 WOTX
- **TG 310847 DENVERSKYHUBLINK**
- **TG 31700 CRRG**

### Popular Talkgroups

TG 310656 AmericaLink  
TG 91 Worldwide  
TG 93 North America  
TG 3100 USA

### Cross Connect

TG 31010 Alabama YSF 02034  
TG 27246 CQ-UK WiRES-X 27793  
TG 31444 RI YSF 02312

### TAC Channels and Talkgroups

TAC 310 – TAC 319

# Where is the Action?

- **FCS**

- <http://fcs002.xreflector.net/#>

- **Brandmeister**

- <https://app.brandmeisteractivity.live/>

- <https://hose.brandmeister.network/>

- **Learn how to use Brandmeister** - <https://brandmeister.network/>

- **Last Heard on Talkgroup** - <https://brandmeister.network/?page=lh&DestinationID=310759>



# Action on WiRES-X.

## ➤ WiRES-X

➤ <https://www.hamoperator.com/rw/>

COLORADO-MEGA	40895	003	Colorado MEGA XCoder	Castle Rock	Colorado	USA	<a href="http://www.parkerradio.org">http://www.parkerradio.org</a>
COLORADO-LNK	40052	003	COLORADO LINK	Denver	Colorado	USA	Colorado Amateur Radio Team
DENVERSKYHUBLINK	46361	003	DENVERSKYHUBLINK	Wheat Ridge	Colorado	USA	<a href="http://www.skyhublink.com">www.skyhublink.com</a>

➤ [https://wires-x.yaesu.com/wires-x/en/id/active\\_room](https://wires-x.yaesu.com/wires-x/en/id/active_room)

LATEST WIRES-X ACTIVE ROOM ID LIST

<u>ROOM ID</u>	<u>DTMF ID</u>	<u>Act</u> ▼	<u>Room Name</u>	<u>City</u>	<u>State</u>	<u>Country</u>
<u>ALLJA-CQ-ROOM</u>	20510	160	ALL JA CQ ROOM#1	Yamato-city	Kanagawa	Japan
<u>—AMERICA-LINK</u>	21080	058	America Link Network	Beaumont	Texas	USA
<u>ITALY</u>	27003	048	WIRES-X ITALIA	Cassolnovo	Lombardy	Italy

# BlueDV and ZUMspot USB Stick



BlueDV for Windows

Menu Update About

FUSION FCS002 07 Link Unlink  YSF  FCS

By David PA7LIM Version 1.0.0.9572

SERIAL

DMR

DSTAR

FUSION

Frequency 433.900.000 Firmware ZUMspot-v1.4.16\_ RX  
DMR master Dest TG BER

CALL W0SUN  
NAME WILLIAM  
INFO 3135334  
C4FM Status

TX RX

Lastheard	AMBE	BM lookup	APRS chat
Time	Call	Name	Mode
03:52 PM	N5YX	Grant	FUSION
03:52 PM	N5YX	Grant	FUSION
03:52 PM	N5YX	Grant	FUSION
03:53 PM	N5YX	Grant	FUSION
03:53 PM	N5YX	Grant	FUSION
03:53 PM	N5YX	Grant	FUSION
03:53 PM	N5YX	Grant	FUSION
04:40 PM	KC0JIM	James	FUSION
04:40 PM	KC0JIM	James	FUSION
04:40 PM	KC0JIM	James	FUSION
04:42 PM	W0SUN	William	FUSION
04:42 PM	W0SUN	William	FUSION

DMR Call Status Not Connected

DSTAR Call Status Not Linked


FUSION Call Status Linked to FCS002 07

Mute spk



# Peanut for Windows or Android

<http://peanut.pa7lim.nl/>

## MS Windows

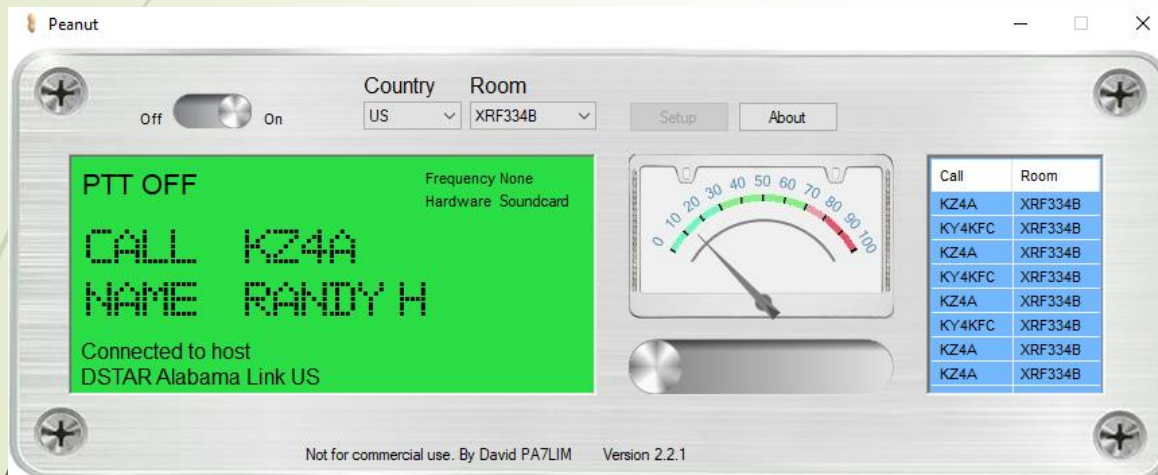

## Android

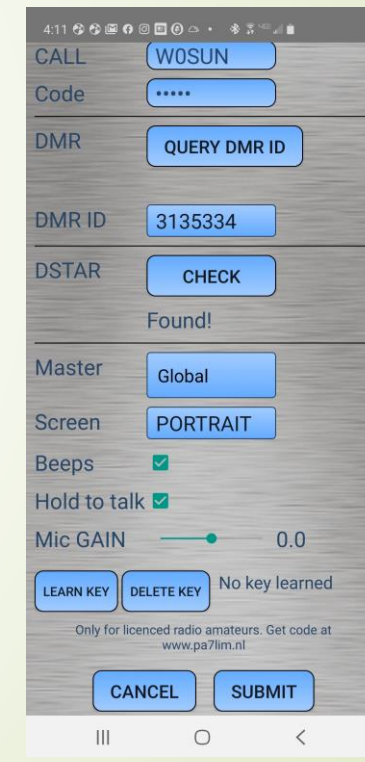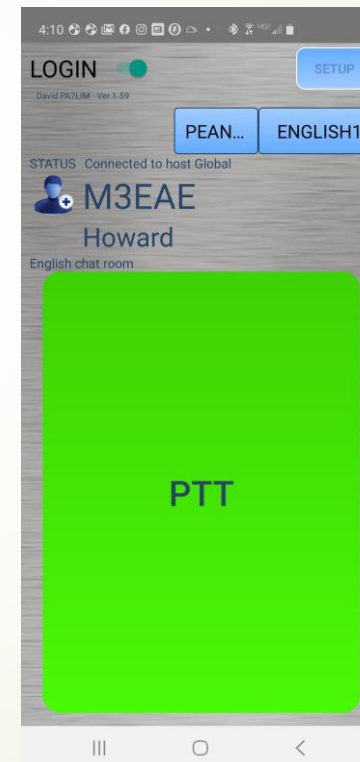

# Useful Links – WØSUN Favorites

- ▶ Parker Radio Association, Colorado Mega Transcoder  
<https://www.parkerradio.org/on-the-air/>
- ▶ Denver Skyhub Link – Society of Broadcast Engineers  
<https://skyhublink.com/connections/>
- ▶ WiRES-X Rooms and Nodes  
<https://www.hamoperator.com/rw/>  
[http://www.yaesu.com/jp/en/wires-x/id/id\\_active.php](http://www.yaesu.com/jp/en/wires-x/id/id_active.php)
- ▶ Pi-Star  
<https://www.pistar.uk>
- ▶ FCS – FCS002  
<http://fcs002.xreflector.net>
- ▶ Brandmeister Last Heard  
<https://app.brandmeisteractivity.live/>  
<https://hose.brandmeister.network/>  
<https://brandmeister.network/?page=lh&DestinationID=310759> ← ←